CONSTRUCTION OF SYSTEMATIZED BUILDING STRUCTURE

Dr. Mamoru Iwata[1], Mitsuhiko Yazaki[1],
Hiroki Kawai[2], and Prof. Dr. Akira Wada[3]

[1] Nippon Steel Corporation, 6-3, Otemachi 2-chome, Chiyoda-ku, Tokyo
[2] Nikken Sekkei Ltd, 4-27, Koraku 1-chome, Bunkyo-ku, Tokyo
[3] Tokyo Institute of Technology, Nagatsuta, Midori-ku, Yokohama

SUMMARY

The Systematized Building Structure (SBS) is a system for supplying general-purpose structures for medium- and high-rise buildings. Systems approach is made to the SBS, taking into consideration every technological possibility and consistency at each level of material, components, members, building elements and structural organization. The SBS at the present stage looks like a traditional Japanese timber structure. This SBS is a prefabricated structural system consisting of column and beam, and uses fitted joints instead of conventional bolting or welding connection.

1. PREFACE

Industrially advanced countries, having telecommunications technology through the use of electronics, satellites, fiber optics and other high technologies, are rapidly transforming into advanced information societies. This has helped accelerate the shift toward tertiary industries and concentration of population in urban areas, resulting in the growth of buildings and urban facilities in both magnitude and height. Further, modern urban buildings, which emerged about one hundred years ago, are on the verge of obsolescence. Yet, even at this stage, the construction industry is still unable to shake free from the restraints of conventionalism, and lags far behind other industrial sectors in productivity. With no or very little improvement foreseeable in the construction labor situation, it is getting harder and harder for the construction industry to recruit people.

In this situation, research and development primarily aimed at the improvement of productivity in construction has finally been initiated in the past several years. Specifically, R&D is addressing the introduction of new constructional materials, new manufacturing and fabricating systems, construction automation, and AI in design and management. Building construction as an integrated system aided by these technologies will be a breakthrough in the present impasse of the construction industry, through the introduction of industrial efficiency. Furthermore, providing building elements with variability and interchangeability will promote the recycling of constructional materials and eventually lead to the conservation of energy and resources.

The Systematized Building Structure (SBS) discussed in this paper is a system for supplying general-purpose structures for medium- and high-rise buildings.

Thus far, systematized building construction has been developed and utilized for housing, factory and office-building construction purposes in many fields and in many different ways. Yet, given these premises, we still propose to further address the task of developing the SBS now, for the following reasons:

(1) The need for improvement of the construction labor situation.
(2) Emergence of technology seeds in peripheral high technologies to facilitate and promote industrialized building construction.
(3) The imminent need for conservation of constructional materials and energy.
(4) Social need for modernization of the construction industry and a new setup for building manufacture and construction.
(5) The need for a system for integrating the design, manufacture, construction and maintenance of buildings, based on computerization and communications.

2. CONDITIONS FOR ORGANIZING THE SBS

As a condition for organizing the SBS, the environment for construction of a building needs to be viewed as a certain hierarchy. In a sense, this hierarchization is characteristic of building construction itself. Also, in order to permit the scientific growth and development of building construction, which is an extremely complex, total system containing both metaphysical and physical problems, hierarchization is indispensable. To promote the rational progress in sophistication and self-organization in building construction, hierarchization is a very effective approach.

For the SBS we have in mind, the following hierarchy is envisaged (Fig. 1).



Fig. 1

(1) Human interface goods.
Goods which directly interface with humans and support human life: furniture, lighting equipment, interior goods, AV equipment and other home electrification equipment.
(2) Architectural attachment.
Goods which do not fixate architectural space but are mounted on the architectural space system, for decoration or for improved performance of architectural space: doors, windows, curtain walls and unit equipment.
(3) Architectural space system.
System to fixate architectural space: columns, beams, roofs, floors, walls, stairs and elevators.
(4) Infrastructure.
Facilities which restrain an architectural space system and support economic and social activities outside the building: roads, water-purification, sewerage and energy-supply systems, and telecommunications systems.

In this hierarchy having (4) to (1) levels in the order of predominance, upper-level systems restrict lower-level systems according to prescribed rules. Of the architectural space system, the SBS represents the structure.

3. PERFORMANCE REQUIREMENTS OF THE SBS

The required performance of the SBS is prescribed by infrastructure, which is the upper system, and by the SBS's consistency with the architectural space system as a whole as well as by interfacing with architectural attachment. The SBS's performance is also prescribed by integrated computer control exercised over the design, manufacture, execution and maintenance or the so-called CIM (computer integrated manufacturing), which integrates CAD, CAM, CAC (computer aided construction), and CAP (computer aided planning).

In concrete terms, the SBS's performance requirements are conceived to be as follows:

(1) To conserve energy and resources, structural components of the SBS must have long durability.
(2) The whole architectural space system containing the SBS must be a system with such flexibility vis-a-vis changes in space characteristics as to match changes in functions and uses.
(3) In order to clearly define the structural performance of the SBS, the strength, jointing performance and deformation capacity of individual structural components of the SBS must each be clearly defined and prescribed for high structural integrity.
(4) To assure the long-time use of the SBS in terms of structural members, components must be standardized and possess interchangeability with respect to performance.
(5) In consideration of the construction phase of the SBS, the SBS must be amenable to automation at the site.

4. BASIC CONCEPTS OF THE SBS

With respect of jointing and modules, consistency of the SBS with the architectural space system as a whole is established. In other words:

(1) The SBS is made to be suppliable separately from the architectural attachment of a lower hierarchical level by setting rules for mutual compliance by both the architectural space system as a whole and the architectural attachment.
(2) The SBS consists of four building elements: namely, floor, wall, column and beam.
(3) The SBS's four building elements each consist of members and components.
(4) Members have configurations suited for automatic assembling at the site, with corresponding jointing methods.
(5) Individual components are conceived as being primarily prescribed by configuration and structural characteristics and being functional in their performance when placed in any position of any building. In this respect, individual components are rendered characterless.
(6) Material of components, despite being steel, has outstanding heat resistance and atmospheric corrosion resistance.
(7) Components are manufactured by the production system designed for highly advanced machine work.
(8) Systems approach is made to the SBS, taking into consideration every technological possibility and consistency at each level of material, components, members, building elements and structural organization (Fig. 2). Also sought is structural rationality in the total flow of construction, from the design, manufacture, assembly and erection to maintenance.



Fig. 2

5. AN EXAMPLE OF THE SBS

The SBS at the present stage looks like a traditional Japanese timber structure. This SBS is a prefabricated structural system consisting of column and beam, and uses fitted joints instead of conventional bolting or welding connection.

A column-to-beam joint of the SBS is shown in Fig. 3. This is a rigid joint.

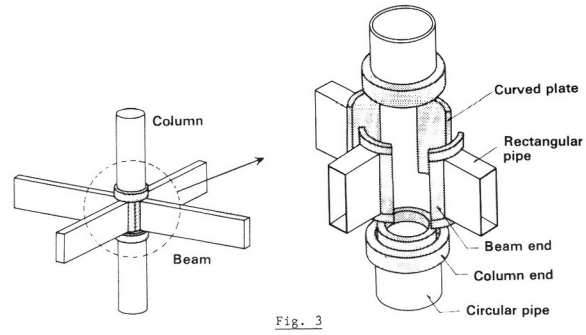

Fig. 3

(1) A column member is made by factory-welding a grooved ring, called the column end, to each end of a circular pipe.
(2) A beam member is made by factory-welding a quartered cylindrical segment tapered top and bottom, called the beam end, to each end of a rectangular pipe.
(3) At the site, the beam ends are inserted into the groove of the column end. The pressing down of the column end of the subsequent storey column fixes the beam ends.
(4) In the directions where there are no beam members, quartered cylindrical segments tapered top and bottom, called the curved plate, are inserted.
(5) In order to secure structural integrity of the joint, the column ends are further tightened using hydraulic jacks.

These ingenious devices are designed to transfer axial forces, bending moment and shearing force at the column-to-beam joints. Column ends, beam ends and curved plates are forged and machined for greater dimensional accuracy.

The SBS has been applied to the actual construction of a building having three storeys and one basement, with a span of 7.8m and a ridge span of 18m (3.6m x 5m span), as shown in Fig. 4.


Fig. 4

Reprinted from the Extended Abstracts
of the IV-ICCCBE '91 Conference, Tokyo.